


ENVIRONMENTAL BARRIER COMBINED WITH SINGLE OPEN BOX BEAM SAFETY FENCE

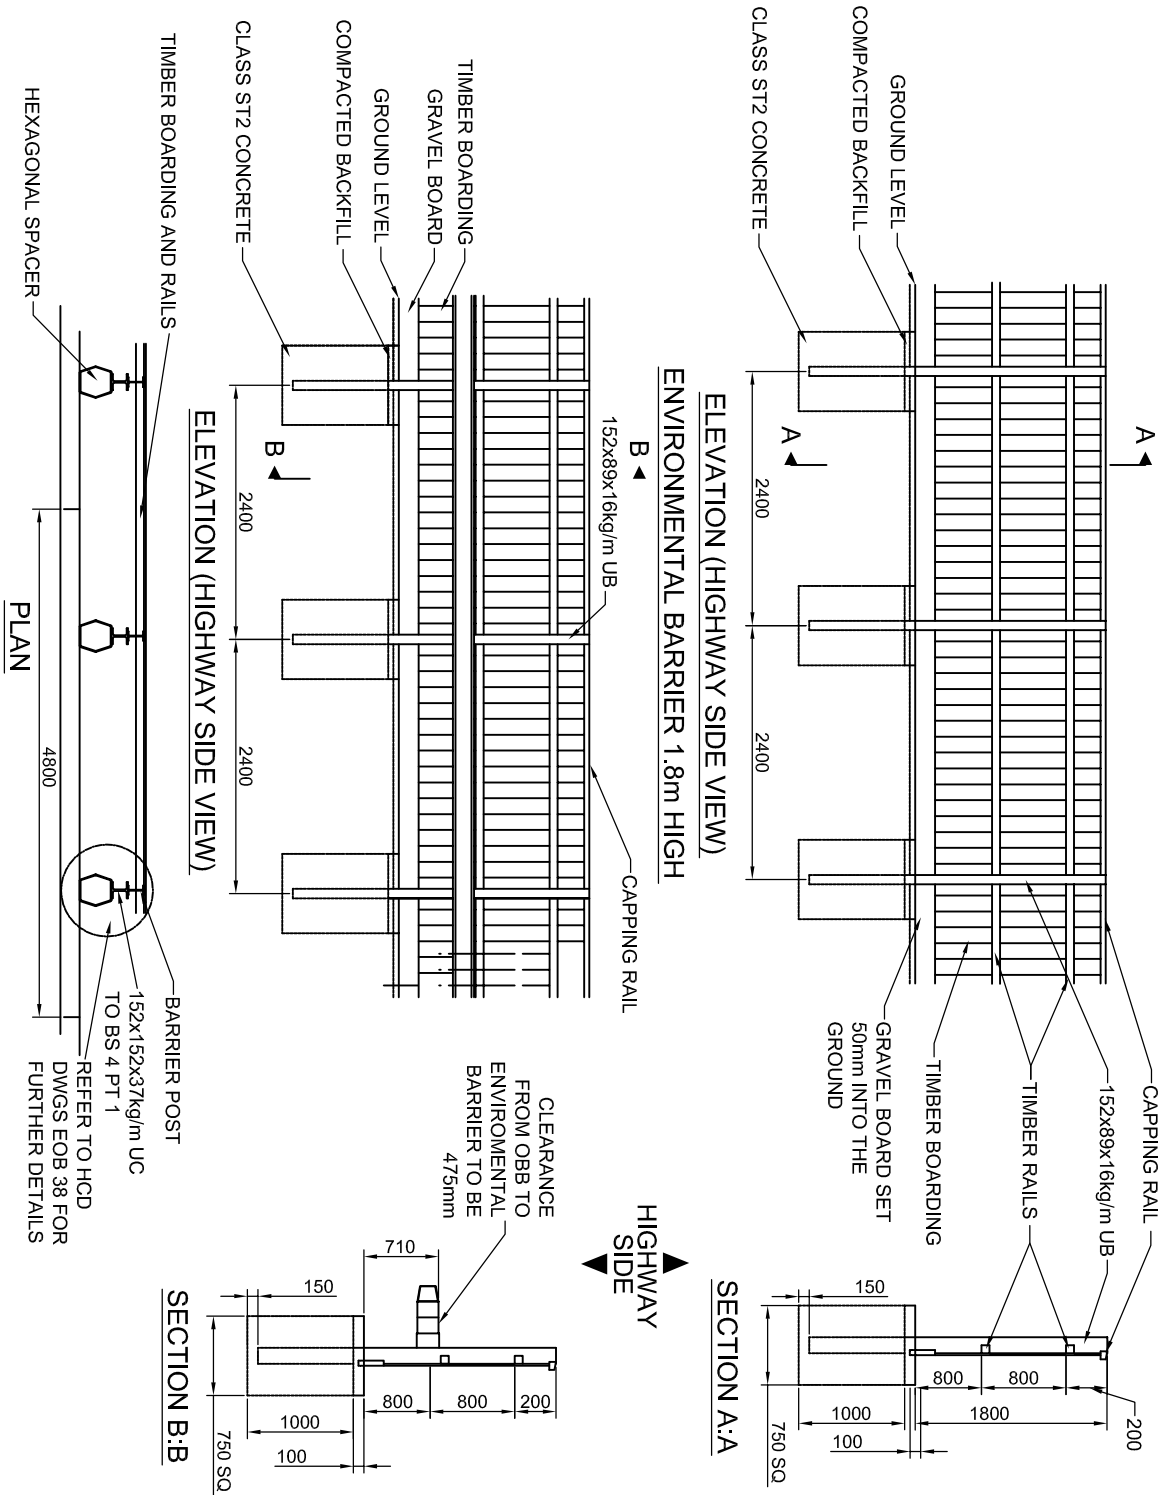

1. FOUNDATION CONCRETE SHALL BE CLASS ST2. POST FOUNDATIONS SHALL BE 750mm SQUARE BY 1000mm DEEP, FROM 100mm BELOW FINISHED GROUND LEVEL.
2. PRIOR TO ERECTION UNEVEN GROUND ON THE LINE OF THE BARRIER SHALL BE GRADED AND LEVELLED AS REQUIRED.
3. ALL TIMBER IS TO BE CCA PRESSURE TREATED SAWN SOFTWOOD IN ACCORDANCE WITH SERIES 400 CLAUSE 416X NOTES 1 TO 4 AND SERIES 2600 CLAUSE 2641X NOTES 1 TO 10 AND TABLES 1 AND 2, AND IN ACCORDANCE WITH BS 5268, BS 1722 AND BS 4978.
4. ALL POSTS TO BS 4360 AND GALVANISED TO BS 729.
5. BOLTS TO BS 4190, WASHERS TO BS 4320 AND NAILS AUSTENITIC STAINLESS STEEL GRADES 302 OR 304.
6. COMMENCEMENT AND TERMINATION OF BARRIERS SHALL BE BY TAPERING FROM 1.2m TO 1.8m OVER A DISTANCE OF 4.8m.