



LONGITUDINAL SECTION TO SHOW JOINT OF NEW CONSTRUCTION WITH EXISTING-FROM FILL

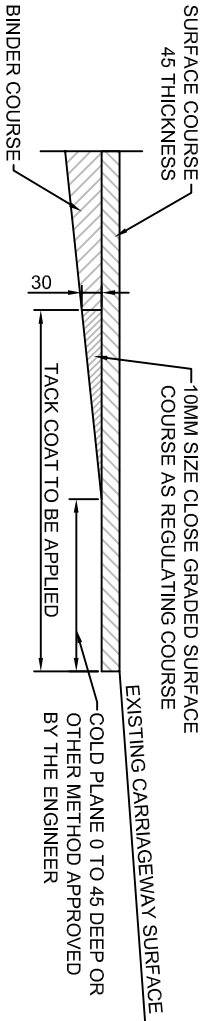

LONGITUDINAL SECTION TO SHOW JOINT OF NEW CONSTRUCTION WITH EXISTING AND AREA TO BE SCARIFIED



LONGITUDINAL SECTION TO SHOW JOINT OF NEW CONSTRUCTION WITH EXISTING - FROM CUT

NOTES

1. TYPE 1 REFERS TO FLEXIBLE CARRIAGEWAY CONSTRUCTION DESIGNED WITH UPPER AND LOWER ROAD BASE FOR VEHICLE FLOWS OF 3000-10000 C.V/D.
2. TYPE II REFERS TO FLEXIBLE CARRIAGEWAY CONSTRUCTION DESIGNED WITH BASE COURSE AND ROAD BASE FOR VEHICLE FLOWS OF LESS THAN 3000 C.V/D.
3. CONSTRUCTION DEPTHS AND MATERIALS AS SPECIFIED IN APPENDIX 7/1 OR AS DIRECTED BY THE ENGINEER.
4. HOLES TO BE PUNCHED THROUGH EXISTING CARRIAGEWAY CONSTRUCTION IN TWO LINES 500MM APART WITH HOLES AT 500MM SPACING AT LOWEST LEVEL TO ALLOW DRAINAGE.
5. VERTICAL JOINTS TO BE PAINTED WITH BITUMEN BEFORE NEW SURFACE.
6. APPLY TACK COAT TO EXISTING SURFACE

KEY

- SURFACE COURSE
- BINDER COURSE
- BASE COURSE
- SUB BASE
- GRANULAR SUB BASE
- FILL MATERIAL

FRAMEWORK CONTRACT FOR HIGHWAY WORKS - MINOR WORKS CONTRACT



Walsall Council



Drawing Title:

STANDARD DETAIL

FLEXIBLE CARRIAGEWAY CONSTRUCTION JOINTS

DRAWN	MJD	DATE	JUL/09
CHECKED	JBF	SCALE	1 : 25
Drawing Number	SD/700/03		
Rev	01		