


CUSHION TYPE	X (mm)	Y (mm)	Z (mm)
TYPE A	2800	1300	750
TYPE B	3300	1300	1000
TYPE C	3300	1300	600

- NOTES**
- TABLES TO BE SURFACED IN HOT ROLLED ASPHALT SURFACE COURSE TO CLAUSE 911 (BS EN13108-4)
 - UNLESS OTHERWISE INSTRUCTED BY THE ENGINEER.
 - SPACING BETWEEN CUSHIONS TO BE 750 MM
 - DISTANCE FROM KERB TO CUSHION TO BE MINIMUM OF 500 MM AND MAXIMUM OF 1200 MM
 - 3 NO. SPEED CUSHIONS TO BE USED WHERE ROAD WIDTH EXCEEDS 7.4 M
 - EXISTING SURFACE TO BE SWEEPED AND TACKCOAT TO BS434 TO BE APPLIED UNDER NEW SURFACING.
 - ALL CUSHIONS TO HAVE 2 NO WHITE THERMOPLASTIC ROAD MARKINGS TO DIAG. 1062 ON EACH
 - (750 MM WIDE X Z MM HIGH) WITH APPLIED BALLOTTINI.
 - CUSHIONS MAY BE CONSTRUCTED WITHOUT BLOCK PAVOIRS WHERE INSTRUCTED BY THE ENGINEER.
 - ALL DIMENSIONS ARE IN MILLIMETRES.



FRAMEWORK CONTRACT FOR HIGHWAY WORKS - MINOR WORKS CONTRACT

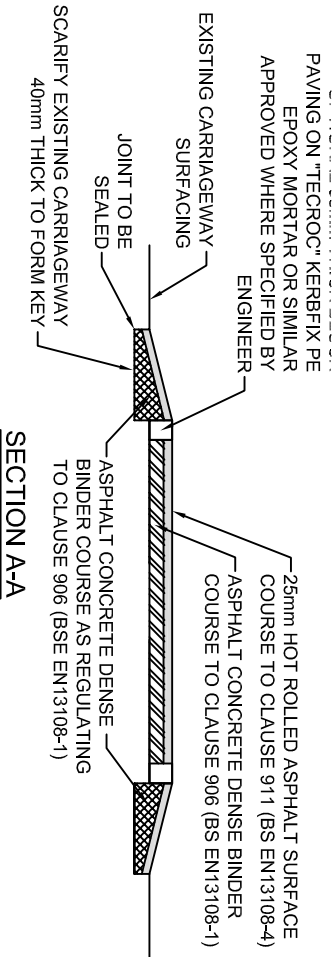

Drawing Title:
**TRAFFIC CALMING MEASURES -
SPEED CUSHION**

STANDARD DETAIL

DRAWN	MJD	DATE	JUL/09
CHECKED	JBF	SCALE	1 : 50

Drawing Number	Rev
SD/700/10	01