

CATCHPIT DETAIL

ROCKER PIPE LENGTHS	
Nominal Diameter (mm)	Effective Length (m)
150 - 600	0.6
OVER 600 - 750	1.0
OVER 750	1.25

ROCKER PIPE FOR LENGTH REFER TO TABLE

PIPES ENTERING CATCHPITS SHALL HAVE A FLEXIBLE JOINT WITHIN 600mm OF THE MANHOLE JOINING WITH A SHORT ROCKER PIPE

PIPE END LOCATED MIN 100mm INSIDE FACE OF CATCHPIT


DOUBLE WIDTH STEP IRONS

ROCKER PIPE FOR LENGTH REFER TO TABLE

COVER SLAB OPENINGS TO BE IN ACCORDANCE WITH BS 5911-3:2002, TABLE 6 AND BE CONSISTENT WITH THE HSE PUBLICATION "SAFE WORK IN CONFINED SPACES" AND BSEN 752-3:1997, ANNEX NB

CHAMBERS WITH OUTGOING PIPES GREATER THAN 525mm DIAMETER SHALL BE FITTED WITH REMOVABLE SAFETY CHAINS (REF. DRG. F10 OF H.C.D.)

H.C.D. = HIGHWAY CONSTRUCTION DETAILS

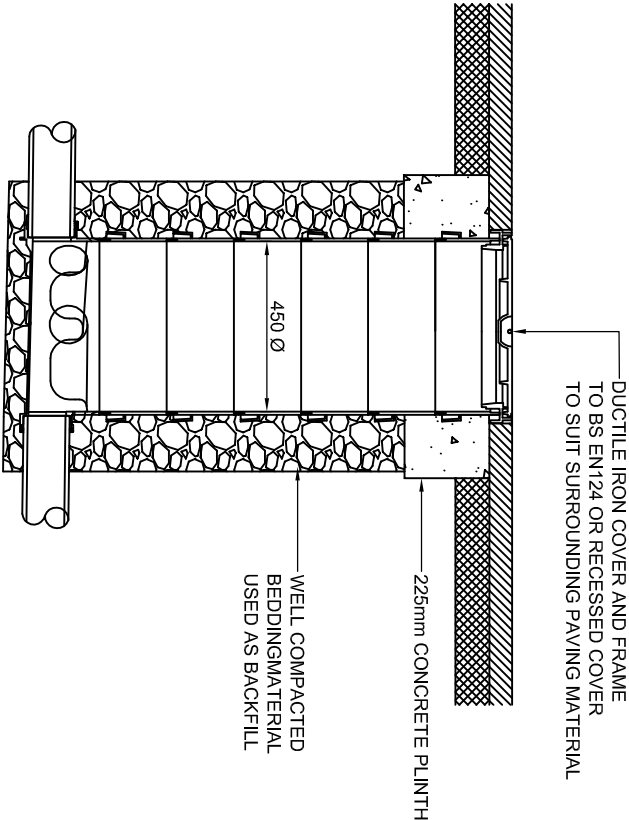

POLYPROPYLENE INSPECTION CHAMBER DETAIL FOR USE IN PEDESTRIAN AREAS

FRAMEWORK CONTRACT FOR HIGHWAY WORKS - MINOR WORKS CONTRACT



**STANDARD DETAIL**

Drawing Title:  
**CATCHPIT AND INSPECTION CHAMBER**

DRAWN	SJC	DATE	JUL/09
CHECKED	JBF	SCALE	NTS
Drawing Number		Rev	
SD/500/11		01	